

Roof Ventilators



Wall Louvres EV-WL

- Complete with screen
- Custom sizes available
- Special order



Round Ventilators EV-Round

- Available in 12" throat size
- Use 1-12" vent per 390 sq. ft.
- Special order



Ridgillators EV-4

- Use 1 ridgillator per 560 sq. ft. of attic area
- **EV-4DK** - Deflector Kit (Also Shown)
- Recommended for use with ridgillator on 6/12 pitch or more




48" Low Profile Ventilators EV-3

- Use 1 low profile vent per 1170 sq. ft. of attic area




Enviro-Vent EV-2

- For use at ridge and hip
- Conforms to G-Rib Profiles
- Fast, easy and economical to install in 36" lengths



Ridge Vent EV-5

- For use at ridge, hip and side wall
- Conforms to Canadian building codes
- Available in 8" x 20' roll
- Use in conjunction with caulking and foam closures for steel roofs

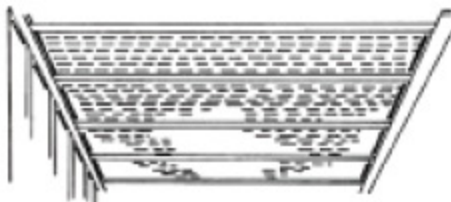

Easy Super Soffit EV-1

- No extra screening required
- Good looking solution to soffit air intake - No unsightly big holes
- For every 10' of building width your attic requires 1" of continuous super soffit per eave. Eg. 40' wide building requires 4" continuous super soffit at each eave.

P.O. Box 130
35 C Meredith Street
Manitowaning, ON
P0P 1N0
Tel/Fax: 705-859-3637
Toll Free: 1-855-859-3637
www.terrastar.ca

