

Roof Ventilators




Wall Louvres EV-WL

- Complete with screen
- Custom sizes available
- Special order



Round Ventilators EV-Round

- Available in 12" throat size
- Use 1-12" vent per 390 sq. ft.
- Special order

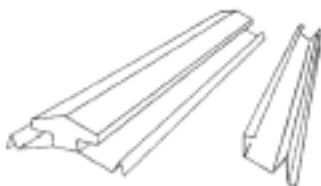

Ridgilers EV-4

- Use 1 ridgiler per 560 sq. ft. of attic area
- **EV-4DK** - Deflector Kit (Also Shown)
- Recommended for use with ridgiler on 6/12 pitch or more




48" Low Profile Ventilators EV-3

- Use 1 low profile vent per 1170 sq. ft. of attic area




Enviro-Vent EV-2

- For use at ridge and hip
- Conforms to G-Rib Profiles
- Fast, easy and economical to install in 36" lengths

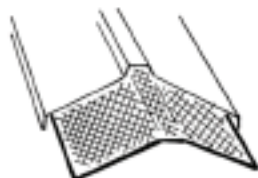

Ridge Vent EV-5

- For use at ridge, hip and side wall
- Conforms to Canadian building codes
- Available in 8" x 20' roll
- Use in conjunction with caulking and foam closures for steel roofs

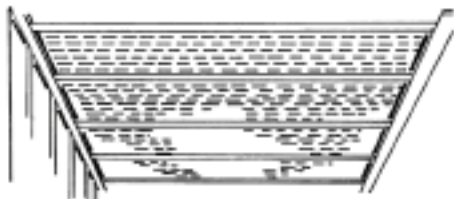

Easy Super Soffit EV-1

- No extra screening required
- Good looking solution to soffit air intake - No unsightly big holes
- For every 10' of building width your attic requires 1" of continuous super soffit per eave. Eg. 40' wide building requires 4" continuous super soffit at each eave.